




## HD 9/18-4 ST

With a working pressure of 180 bar and a water flow of 900 l/h, the configurable HD 9/18-4 ST is the all-round solution in the area of stationary cold water high-pressure cleaners.



### 1 Always flexible thanks to fast retrofitting capability

- Most functions and accessory parts can be retrofitted at any time.
- Simple Plug 'n' Play saves assembly costs.

### 2 Very hot and effective cleaning thanks to a high inlet temperature

- Up to 70°C water supply temperature even in the basic model.
- With an advance pressure pump and heat-resistant seals, temperatures of up to 85°C can be achieved.

### 3 Individual configurability saves investment costs

- You don't pay for anything that isn't really needed.
- Simply choose a basic unit and add only the required functions.

### 4 Long lifetime guarantees high value retention

- Four-pole low-speed electric motor.
- Hard-wearing ceramic pistons.



## HD 9/18-4 ST

### Technical data

<b>Order no.</b>	1.524-500.2	
<b>Current type</b>	Ph / V / Hz	3 / 400 / 50
<b>Protection</b>	A	16
<b>Flow rate</b>	l/h	460-900
<b>Working pressure</b>	bar / MPa	40-180 / 4-18
<b>Max. pressure</b>	bar / MPa	210 / 21
<b>Max. inlet temperature</b>	°C	70
<b>Connection load</b>	kW	6.4
<b>Weight</b>	kg	62.5
<b>Dimensions (L × W × H)</b>	cm / mm	533 × 420 × 790


### Equipment

<b>Spray gun</b>	Easy Press trigger gun	
<b>Spray gun with soft grip</b>	■	
<b>Servo Control</b>	-	
<b>High-pressure hose</b>	m	10 / ID 8, 315 bar
<b>Triple nozzle (0°/25°/40°)</b>	Manual	
<b>Anti-twist system (AVS)</b>	■	
<b>Stainless steel lance</b>	mm	1050
<b>Prepared for Servo Control</b>	■	

■ Included in delivery.

# ACCESSORIES FOR HD 9/18-4 ST

## 1.524-500.2

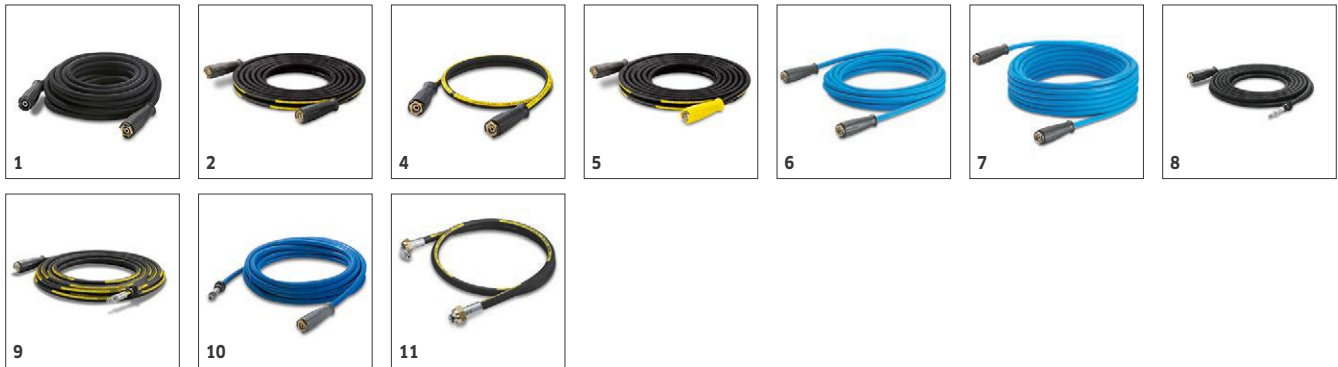


		Order no.	ID	Max. working pressure	Length	Price	Description	
<b>Standard with unions on both sides</b>								
High-pressure hose, 10 m, ID 8, 315 bar, extension	1	6.391-342.0	ID 8	315 bar	10 m		To extend the operating radius with the high-pressure cleaner. Connection on both sides M22 x 1.5.	
<b>Longlife 400 with unions on both sides</b>								
High-pressure hose Longlife 400, 10 m, ID 8, extension	2	6.391-354.0	ID 8	400 bar	10 m		To extend the operating radius with the high-pressure cleaner. Connection on both sides M22 x 1.5.	
High-pressure hose Longlife 400, ID 8, 400 bar, 1.5 m	3	6.392-282.0	ID 8	400 bar	1.5 m			<input type="checkbox"/>
High-pressure hose 1.5 m, ID 8, including connectors	4	6.390-178.0	ID 8	400 bar	1.5 m		1.5 m high-pressure hose (DN 8, M 22 x 1.5) with kink protection and connectors at both ends. For connecting to hose reels with appropriate connector (M 22 x 1.5).	<input type="checkbox"/>
High-pressure hose Longlife 400, 10 m, ID 8, including rotary coupling	5	6.388-083.0	ID 8	400 bar	10 m		10 m high-pressure hose Longlife 400 (DN 8) with rotary coupling, two layer high-strength steel wire reinforced. Connectors at both ends. M 22 x 1.5, with kink protection.	<input type="checkbox"/>
<b>Longlife food design with screw connections at both ends</b>								
High pressure hose food ID 8, 10 m	6	6.391-864.0	ID 8	400 bar	10 m		Longlife HP hose for use in the food industry. Außen-decke## animal-grease-resistant, non-colour-bleeding material. With rotary coupling, 2 x M 22 x 1.5	
High-pressure hose food industry 400 bar, 20 m, ID 8, including rotary coupling	7	6.391-887.0	ID 8	400 bar	20 m			
<b>Standard</b>								
High-pressure hose, 10 m, ID 8, AVS trigger gun connector	8	6.390-025.0	ID 8	315 bar	10 m		10 m high-pressure hose (M 22 x 1.5) with kink protection. With patented rotating AVS trigger gun connector and manual coupling. Further data: DN 8/155°C/315 bar.	<input checked="" type="checkbox"/>
<b>Longlife 400</b>								
High-pressure hose Longlife 400, 10 m, ID 8, AVS trigger gun connection	9	6.391-351.0	ID 8	400 bar	10 m		With patented AVS connection in the trigger gun (rotatable) and hand screw connection, M 22 x 1.5 with kink protection. With double steel reinforcement.	<input type="checkbox"/>
<b>Longlife food design</b>								
High-pressure hose Longlife 400, 10 m, ID 8, AVS trigger gun connection	10	6.391-885.0	ID 8	400 bar	10 m		Longlife HP hose for use in the food industry. Außen-decke## animal-grease-resistant, non-colour-bleeding material. With patented AVS connection in the pistol (pivot mounted)	<input type="checkbox"/>
<b>Special hoses</b>								
High-pressure hose, 1.5 m, ID 8, incl. connection parts, curved outflow	11	6.388-886.0	ID 8	400 bar	1.5 m		Connection hose in longlife quality with 2x M22 x 1.5, with angled connection on one side.	<input type="checkbox"/>

■ Included in delivery. □ Available accessories. ▲ Extension hose.

# ACCESSORIES FOR HD 9/18-4 ST

## 1.524-500.2

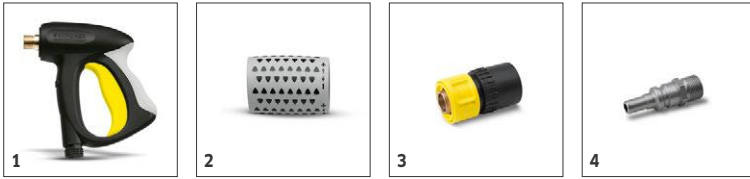

		Order no.	Flow rate				Price	Description	
<b>Easy Press high-pressure trigger gun with holding force reduction (Kärcher patent)</b>									
Easy Press HP trigger gun with soft grip	1	4.775-463.0						Easy press high-pressure trigger gun with softgrip. For high-pressure hoses DN 6 and DN 8 with 11 mm swivel diameter.	■
<b>Servo control</b>									
Servo control	2	4.775-470.0	750-1100 l/h						□
<b>Quick connect</b>									
Quick coupling	3	6.401-458.0						For fast changes between different spray lances/accessories. Perfect for Kärcher spray unit, suitable for trigger gun/spray lance interface. With M 22 x 1.5 internal thread.	□
Male coupling	4	6.401-459.0						Hardened stainless steel male coupling for quick coupling 6.401-458. With M 22 x 1.5 external thread.	□

■ Included in delivery. □ Available accessories. ▲ Extension hose.

# ACCESSORIES FOR HD 9/18-4 ST 1.524-500.2



2

		Order no.	Max. working pressure	Nozzle size			Price	Description	
<b>Triple nozzles</b>									
Triple jet nozzle 055	1	4.767-156.0	300 bar	55					■
Triple nozzle 100	2	4.767-205.0	300 bar	100				Triple nozzle with manual nozzle changeover. Convenient spray adjustment. For high-pressure cleaners with injector; low-pressure fan jet for detergent removal and application. Connector M 18x1.5.	□

■ Included in delivery. □ Available accessories. ▲ Extension hose.

# ACCESSORIES FOR HD 9/18-4 ST

## 1.524-500.2



		Order no.	Max. working pressure	Length			Price	Description
<b>Rotating spray lances</b>								
1050 mm spray pipe, rotatable	1	4.760-660.0	300 bar	1050 mm				1050 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure. ■
600 mm spray pipe, rotatable	2	4.760-664.0	300 bar	600 mm				600 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure. □

■ Included in delivery. □ Available accessories. ▲ Extension hose.

# ACCESSORIES FOR HD 9/18-4 ST 1.524-500.2

**KÄRCHER**