

## HD TRAILER GASOLINE

For independent, long high-pressure cleaning applications on construction sites and in municipalities: preconfigured, mobile HD trailer HD 9/23 Ge Tr1 with 1000 litre water tank and Honda petrol engine.




Order No. 0.300-420.0

Technical data		
EAN code		4054278600697
Flow rate	Litres per hour	400 – 930
Feed temperature	Celsius	60
Operating pressure	Bar / Mega pascal	40 – 230 / 4 – 23
Engine manufacturer		Honda
Engine type		GX 390
Weight (with accessories)	Kilogram	548.914
Dimensions (L × W × H)	Millimetre	3402 × 1496 × 1435

Equipment		
Trigger gun		EASY!Force Advanced
High-pressure hose length	Metre	30
High-pressure hose type		Premium quality
High-pressure hose specification		ID 8, 315 bar
Spray lance	Millimetre	1050
Servo Control		■
Power nozzle		■
Dirt blaster		■
Cleaning agent function		Suction

■ Included in delivery.

This device requires instruction.

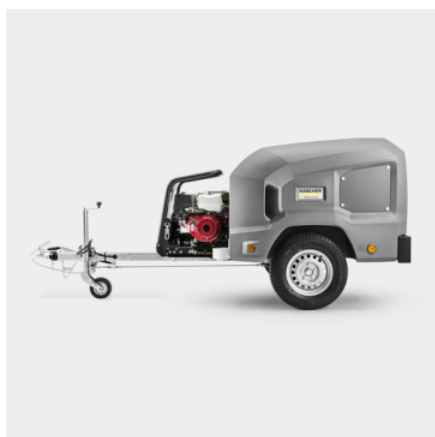

## Independent of an external power or water supply

- 1000 litre water tank for at least one hour of work at full power.
- Integrated trailer concept for high mobility and maximum independence.
- Can be used independently of a power supply thanks to powerful gasoline engines.



## Easy and convenient operation

- Very simple operation, thus designed for use in rental parks.
- Convenient equipment with motor electro start and optional hose reel.
- Storage compartment in the rear section for storing fuel canister and accessories.



## Preconfigured trailer version

- Ex works with dampers, hose reel, crane hooks and premium accessories package.
- With front guard plate, tarpaulin, hour meter and fuel canister (20 l).

## EQUIPMENT FOR HD TRAILER GASOLINE

### 0.300-420.0



		Order No.	Description	
<b>TRIGGER GUNS</b>				
<b>Trigger guns</b>				
EASY!Force Advanced	1	4.118-005.0	Effortless, not energy-sapping: the EASY!Force high-pressure gun uses the recoil force of the high-pressure jet to reduce the holding force for the operator to zero.	■
<b>Servo Control</b>				
Servo Control, 750 Litres per hour - 1100 Litres per hour	2	4.118-008.0	Water quantity and pressure regulated directly from the hand spray gun.	■
<b>SPRAY LANCES</b>				
<b>Rotating spray lances</b>				
Spray lance, 1050 Millimetre, rotatable	3	4.112-000.0	1050 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	■
<b>HIGH-PRESSURE HOSES</b>				
<b>Standard with unions on both sides</b>				
High-pressure hose, 15 Metre, DN 8, 315 Bar, 2 x EASY!Lock	4	6.110-030.0	15 m long high-pressure hose, DN 8, with ANTI!Twist and time-saving EASY!Lock manual screw fitting on both sides.	■
<b>ECO!BOOSTER</b>				
eco!Booster TR 050	5	2.113-088.0	eco!Booster with 50% higher area performance than the Kärcher power nozzle; ideal for delicate surfaces. For cold and hot water high-pressure cleaners (nozzle size 050).	□
<b>QUICK CONNECT</b>				
Quick-fitting pipe union coupler trapezo	6	2.115-000.0	For fast changes between different spray lances/accessories. Perfect for Kärcher spray unit, suitable for trigger gun/spray lance interface. With M 22 x 1.5 internal thread.	□
Quick-fitting pipe union plug nipple tra	7	2.115-001.0	Hardened stainless steel male coupling for quick coupling 2.115-000. With M 22 x 1.5 external thread.	□
<b>DRUM AND TANK CLEANING</b>				
Add-on kit mud sucker	8	2.641-798.0	For connection to the high-pressure hose of Kärcher high-pressure cleaners: Powerful sludge suction cleaner for the retrofitting of high-pressure cleaners to dirt pumps.	□
<b>FLOOR AND HARD SURFACE CLEANER</b>				
<b>Hard Surface Cleaner FRV 30</b>				
FRV 30	9	2.111-010.0	With the integrated, automatic suction of the dirty water, the FRV 30 makes surface cleaning even more efficient and can be used in both inside and outside areas. There is no longer a need to rinse the surface after cleaning, since the dirty water can be discharged through the 5 m suction hose supplied. Additional quality features are the non-marking steering rollers and double ceramic bearing. Machine-specific nozzle kit must be ordered separately. Max. 250 bar / 1000 l/h / 60°C.	□
<b>Hard surface cleaner FR 30 ME</b>				
FR 30 ME surface cleaner	10	2.111-013.0	Hot water resistant stainless steel surface cleaner with double ceramic bearings, non-marking swivel castors and suction hose connection. Ideal for indoor cleaning, e.g. food industry.	□
<b>Hard Surface Cleaner FR 50</b>				
FR 50 surface cleaner	11	2.111-023.0	Hot water resistant stainless steel surface cleaner with 500 mm working width. Ideal for large areas. With double ceramic bearings, push handle, non-marking swivel castors and detergent dosing system.	□
<b>Machine-specific nozzle kit for FR</b>				
Nozzle kit for FR, 850 Litres per hour - 1100 Litres per hour	12	2.640-442.0	Nozzle kit includes power nozzles and unions. For Kärcher surface cleaners (850 to 1100 l/h).	□
<b>FRV 30 Me surface cleaner</b>				
FRV 30 ME	13	2.111-012.0	Thanks to automatic suction of the dirty water, the stainless steel FRV 30 Me Surface Cleaner makes surface cleaning more efficient in both inside and outside areas. Hot water cleaning up to 85°C.	□

■ Included in delivery. □ Available accessories.